




Ultra Drain Guard, Oil & Sediment Model

UT9217

Drain Guard | Oil and sediment | Secondary Containment

Performance: 3.5 Litres | 0.8 US Gallons of oil**
18 kg | 40 lbs of sediment

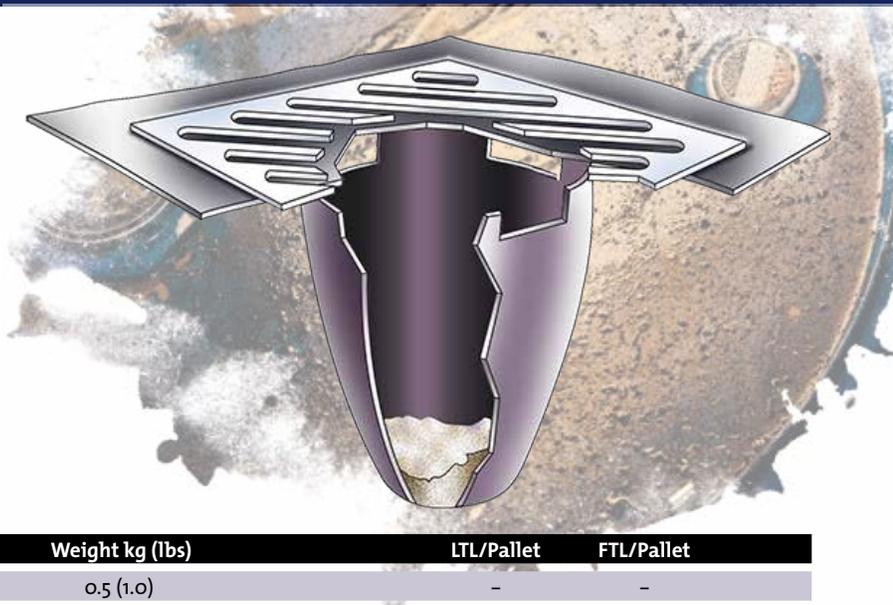

Product Code	Dimensions cm (inches)	Weight kg (lbs)	LTL/Pallet	FTL/Pallet
UT9217	120 x 91.5 x 45.8 (48 x 36 x 18)	0.5 (1.0)	-	-

The Ultra-Drain Guard is engineered to filter storm water waste before it becomes a problem in the water system. As a storm drain filter, it removes contaminants like litter, sand, and oil from storm water flow. It's geotextile fabric and easy installation makes it ideal for industrial facilities, construction sites, and parking lots where storm water runoff is likely to carry oil, eroded soil, debris, and fuel contaminants from cars.

Compliance:

Exceeds 80% sediment removal efficiency. Helps comply with NPDES, 40 CFR 122.26 (1999) when used as Best Management Practice in Storm water Pollution Prevention Plans.

Installation:

Easily installed in most drains. To do it, simply raise the grate, place the Drain Guard over the opening, and carefully lower the grate back in place. As a final step, pinch the fabric in place to keep it secure.

Project-specific models:

Oil & Sediment Model part number 9217 removes up to .87 gallons of hydrocarbons as well as dirt, sand and other contaminants.



* Basis weights and recycled content are ± 5%
 ** Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.
 *** Weight per case ± 0.5 kg/lbs.

Compliance

Related Regulations	Description
29CFR 1910.22(a)(2)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition."
29CFR 1910.120(j)(1)(vii)	"... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."